



⑨ $\nabla (\overset{x}{\nabla}, \overset{y}{\nabla})$

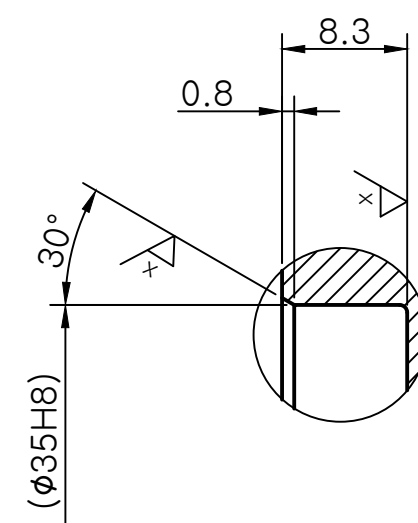

1. 일반공차- 가) 가공부 : KS B ISO 2768-m
나) 주조부 : KS B 0250-CT11
다) 주강부 : KS B 0418-B급
2. 도시되고 지시없는 모떼기는 1X45°, 모깎기는 R3
4. ☒ 부위 외면 명록색 도장
내면 광명단 도장
5. 기어 치부 열처리 Hrc 50 $\pm$ 2 (품번 9)
6. 표면 거칠기

 = 
 =  , N10
 =  , N8
 =  , N6

9	외부스퍼기어	SC480	1	
6	앞커버	GC200	1	
품번	품 명	재질	수량	비 고
제목	기어박스	수험번호		480824E1002
한국ATC센터(주)			척도	1:1
			각법	3각법