


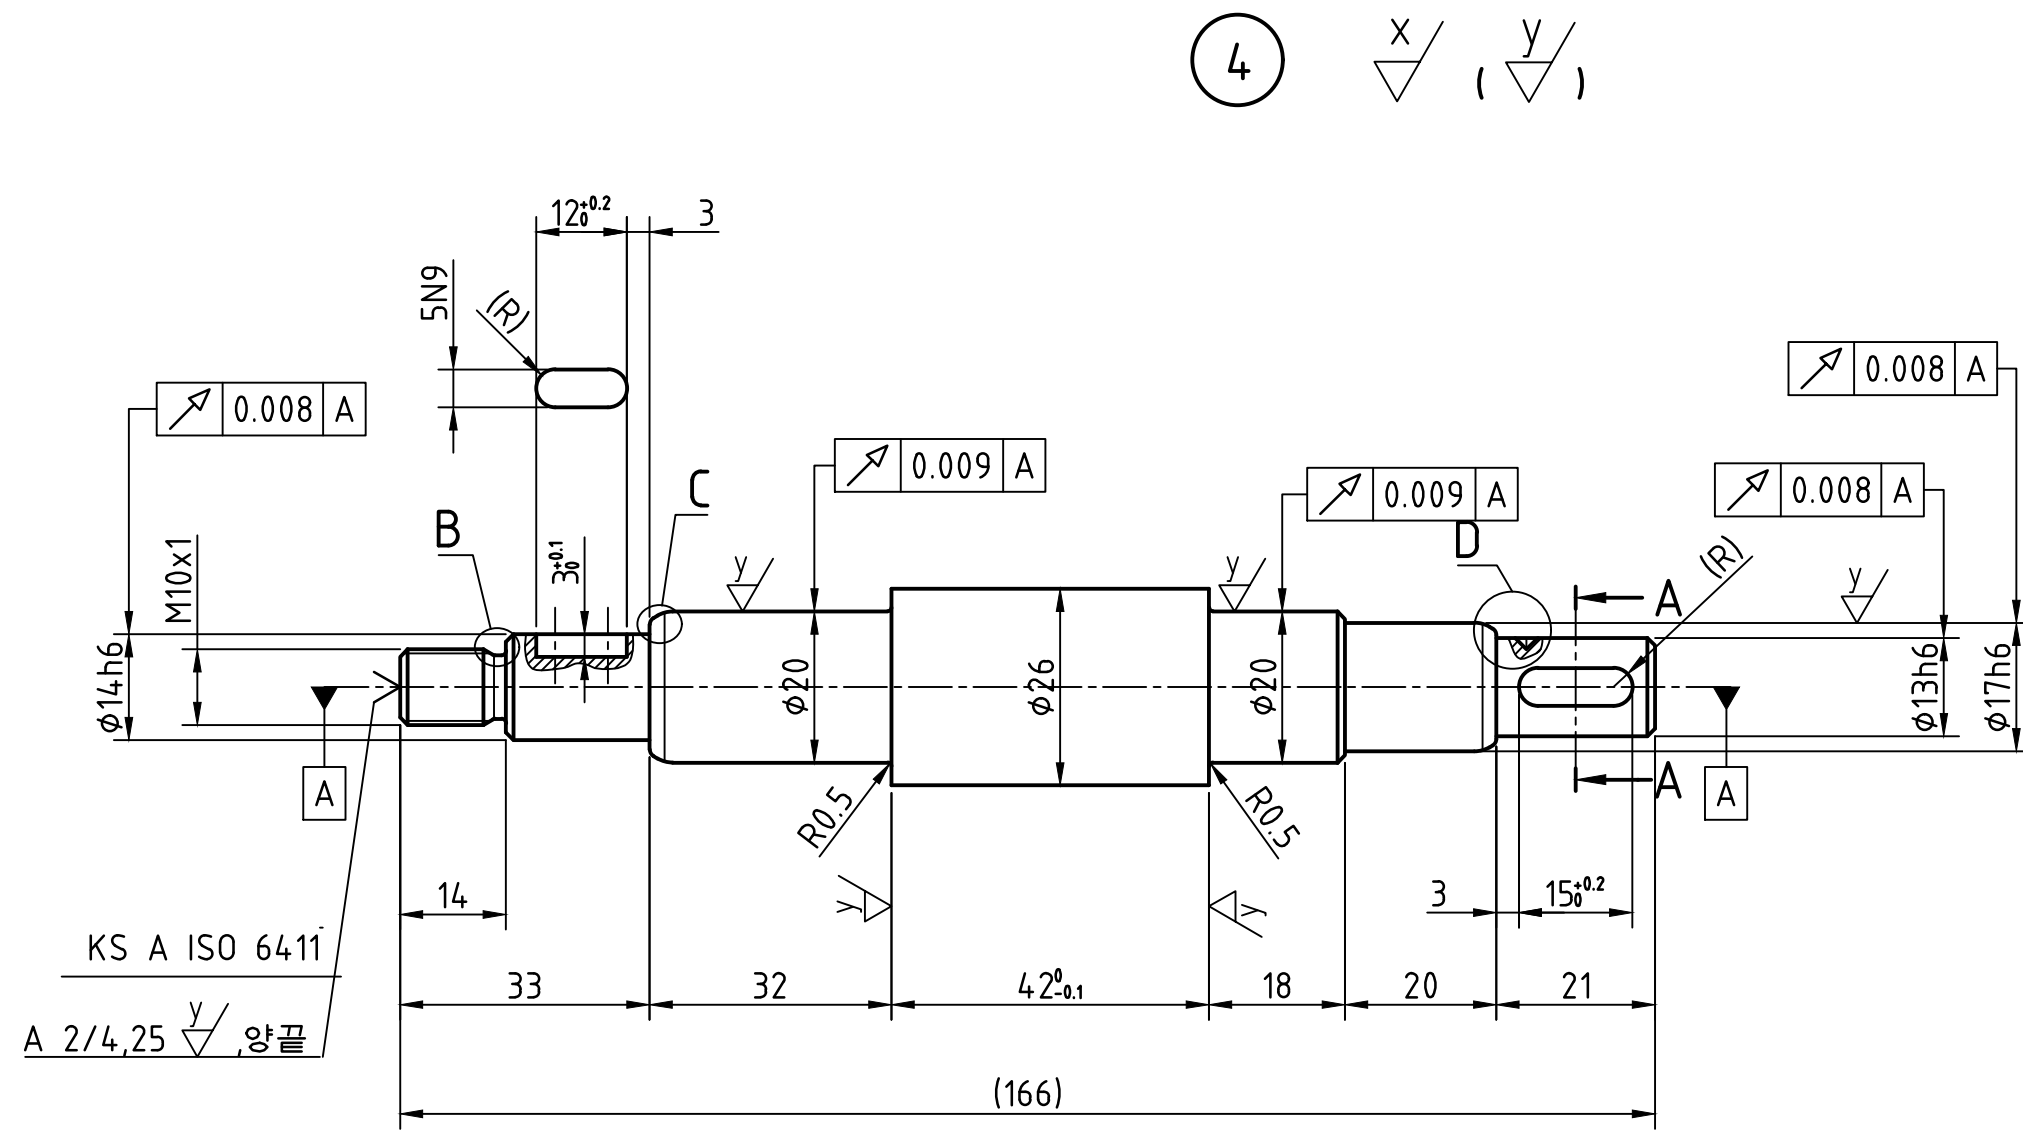





단면 A-A

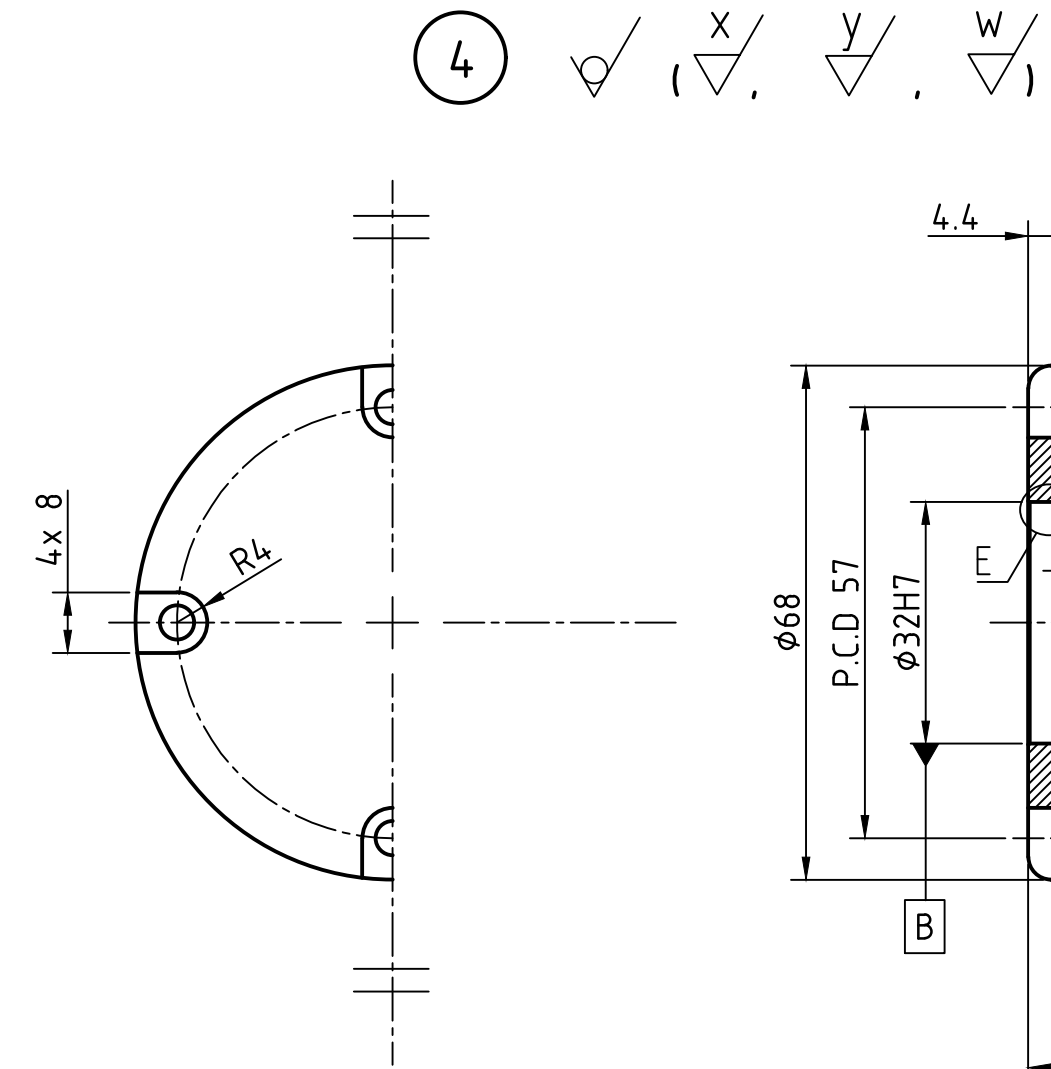


E(2:1)

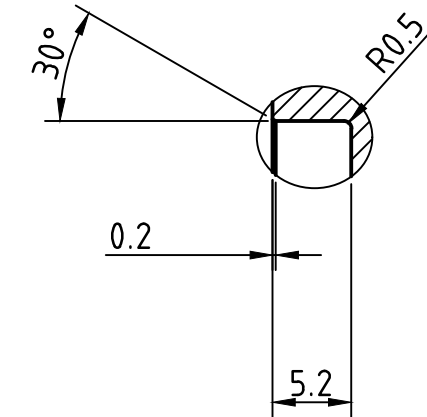


D(5:1)

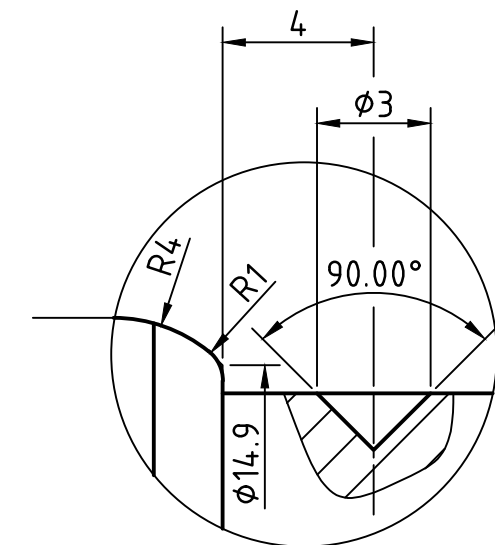

C(5:1)

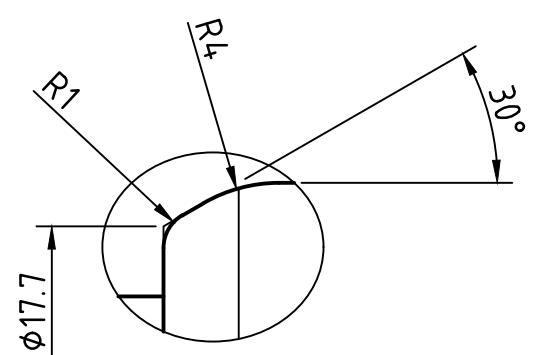

B(5:1)

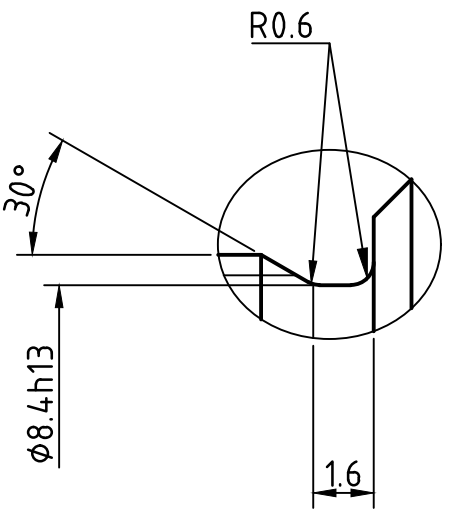

주서

- 일반공차 - 가) 가공부 : KS B ISO 2768-m
나) 주조부 : KS B 0250-CT11
- 도시되고 지시없는 모떼기는 1x45°, 모작기는 R3
- 일반 모떼기는 0.2x45°
- $\sqrt{\text{X}}$ 부위 외면 명록색 도장
내면 광명단 도장 (품번 3)
- 파커라이징 처리(품번 4)
- 기어 치부 열처리 HRC 50 $\pm$ 2 (품번 4)
- 표면 거칠기

$$\begin{aligned} \sqrt{\text{X}} &= \sqrt{\text{X}} \\ \sqrt{\text{W}} &= \sqrt{\text{W}}^{12.5}, \text{ N10} \\ \sqrt{\text{X}} &= \sqrt{\text{X}}^{3.2}, \text{ N8} \\ \sqrt{\text{Y}} &= \sqrt{\text{Y}}^{0.8}, \text{ N6} \end{aligned}$$

4	축	SM45C	1	
2	커버 A	GC200	1	
품번	품명	재질	수량	비고
제목	중력전달장치	수험번호	720507E1008	
한국 ATC센터(주)			척도	1:1
			각법	3각법