

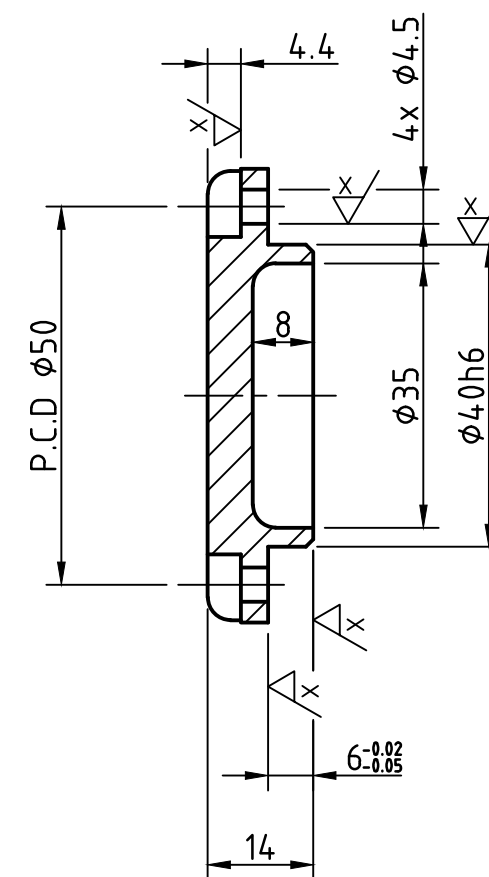


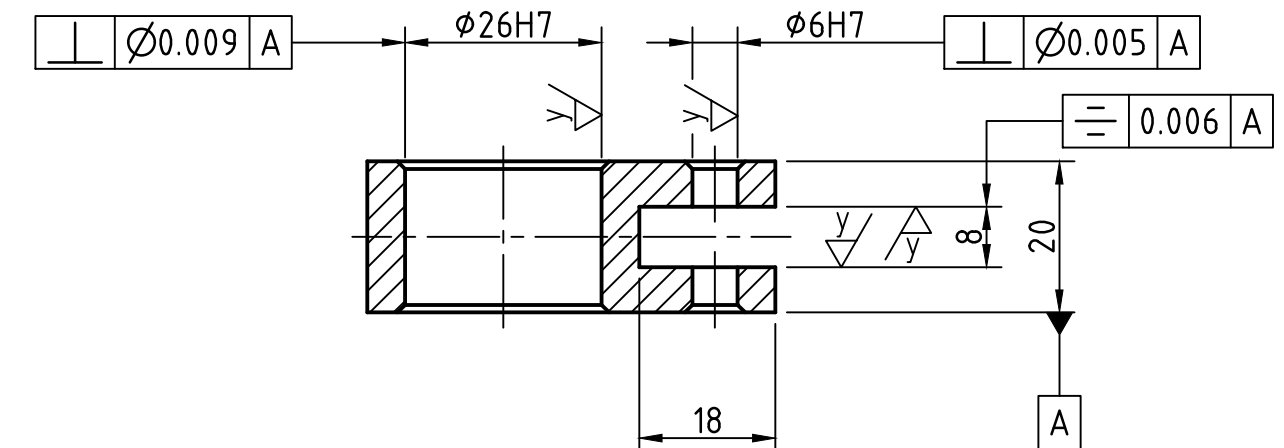

⑥ $\frac{x}{\nabla}$ $(\frac{y}{\nabla})$

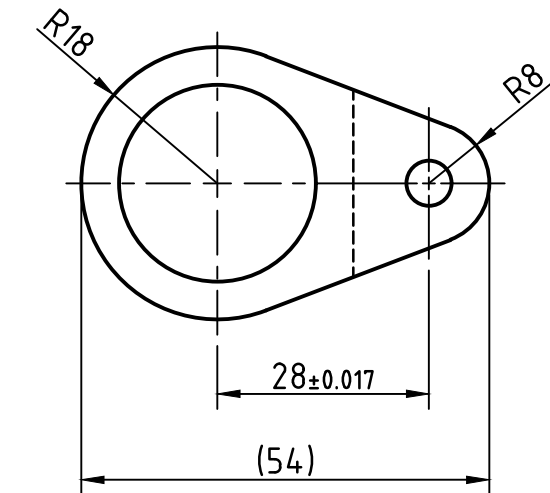

1. 일반공차 - 가) 가공부 : KS B ISO 2768-m
나) 주조부 : KS B 0250-CT11
2. 도시되고 지시없는 모떼기는 $1 \times 45^\circ$, 모깎기는 R3
3. 일반 모떼기는 $0.2 \times 45^\circ$
4. 부위 외면 명색색 도장
내면 광명단 도장 (품번 5)
5. 파커라이징 처리 (품번 6)
6. 전체 열처리 HRC 50 ± 2 (품번 6)
7. 표면 거칠기

 = 
 =  , N10
 =  , N8
 =  , N6

6	링크	SM45C	1	
5	뒤커버	GC250	1	
품번	품명	재질	수량	비고
제목	편심구동장치	수험번호	720712E1002	
한국 ATC센터(주)			척도	1 : 1
			각법	3각법